



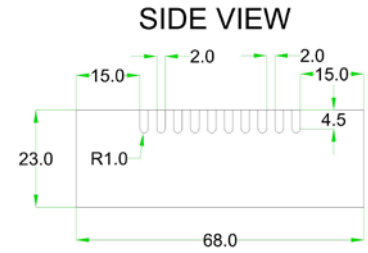

## Noise Trigger Security Sensor (SEC-SOUND)

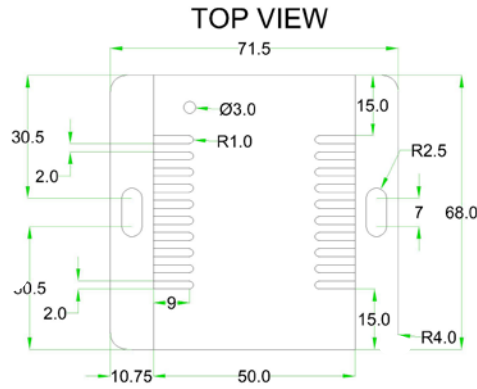

### General Description

Designed for monitoring noise level in applications for security , safety and health.

### Key Features

- Plugs into the base unit (BASE-WIRED).
- Powered by the base unit (BASE-WIRED).
- Compact plug & play sensor.
- OU rack or wall mountable.
- Steel inclosure. Industrial Grade.
- Alerts via SNMP Traps, email, SMS or voice calls.
- monitor noise levels as per OSHA requirements or for HCAHPS
- designed for indoor use.

### Technical Specifications

Power Source	SensorGateway (BASE-WIRED)
Power Usage	312 mW
Sensor Accuracy	$\pm 1$ db
Sound (db) Resolution:	1 db precision
Sensor range	from 10db to 90db

### Environmental and Physical Specification

Operating temperature range	0°C to +75°C (32°F to +167°F)
Humidity (operating and storage)	< 90% rH (non-condensating).
Dimensions	74 mm (2.9") x 66 mm (2.59") x 22 mm (0.8")
Weight	0.12kg (0.26 lbs.)